



ADAPTIVE
DIRECT
FASTENING

DEPRAG

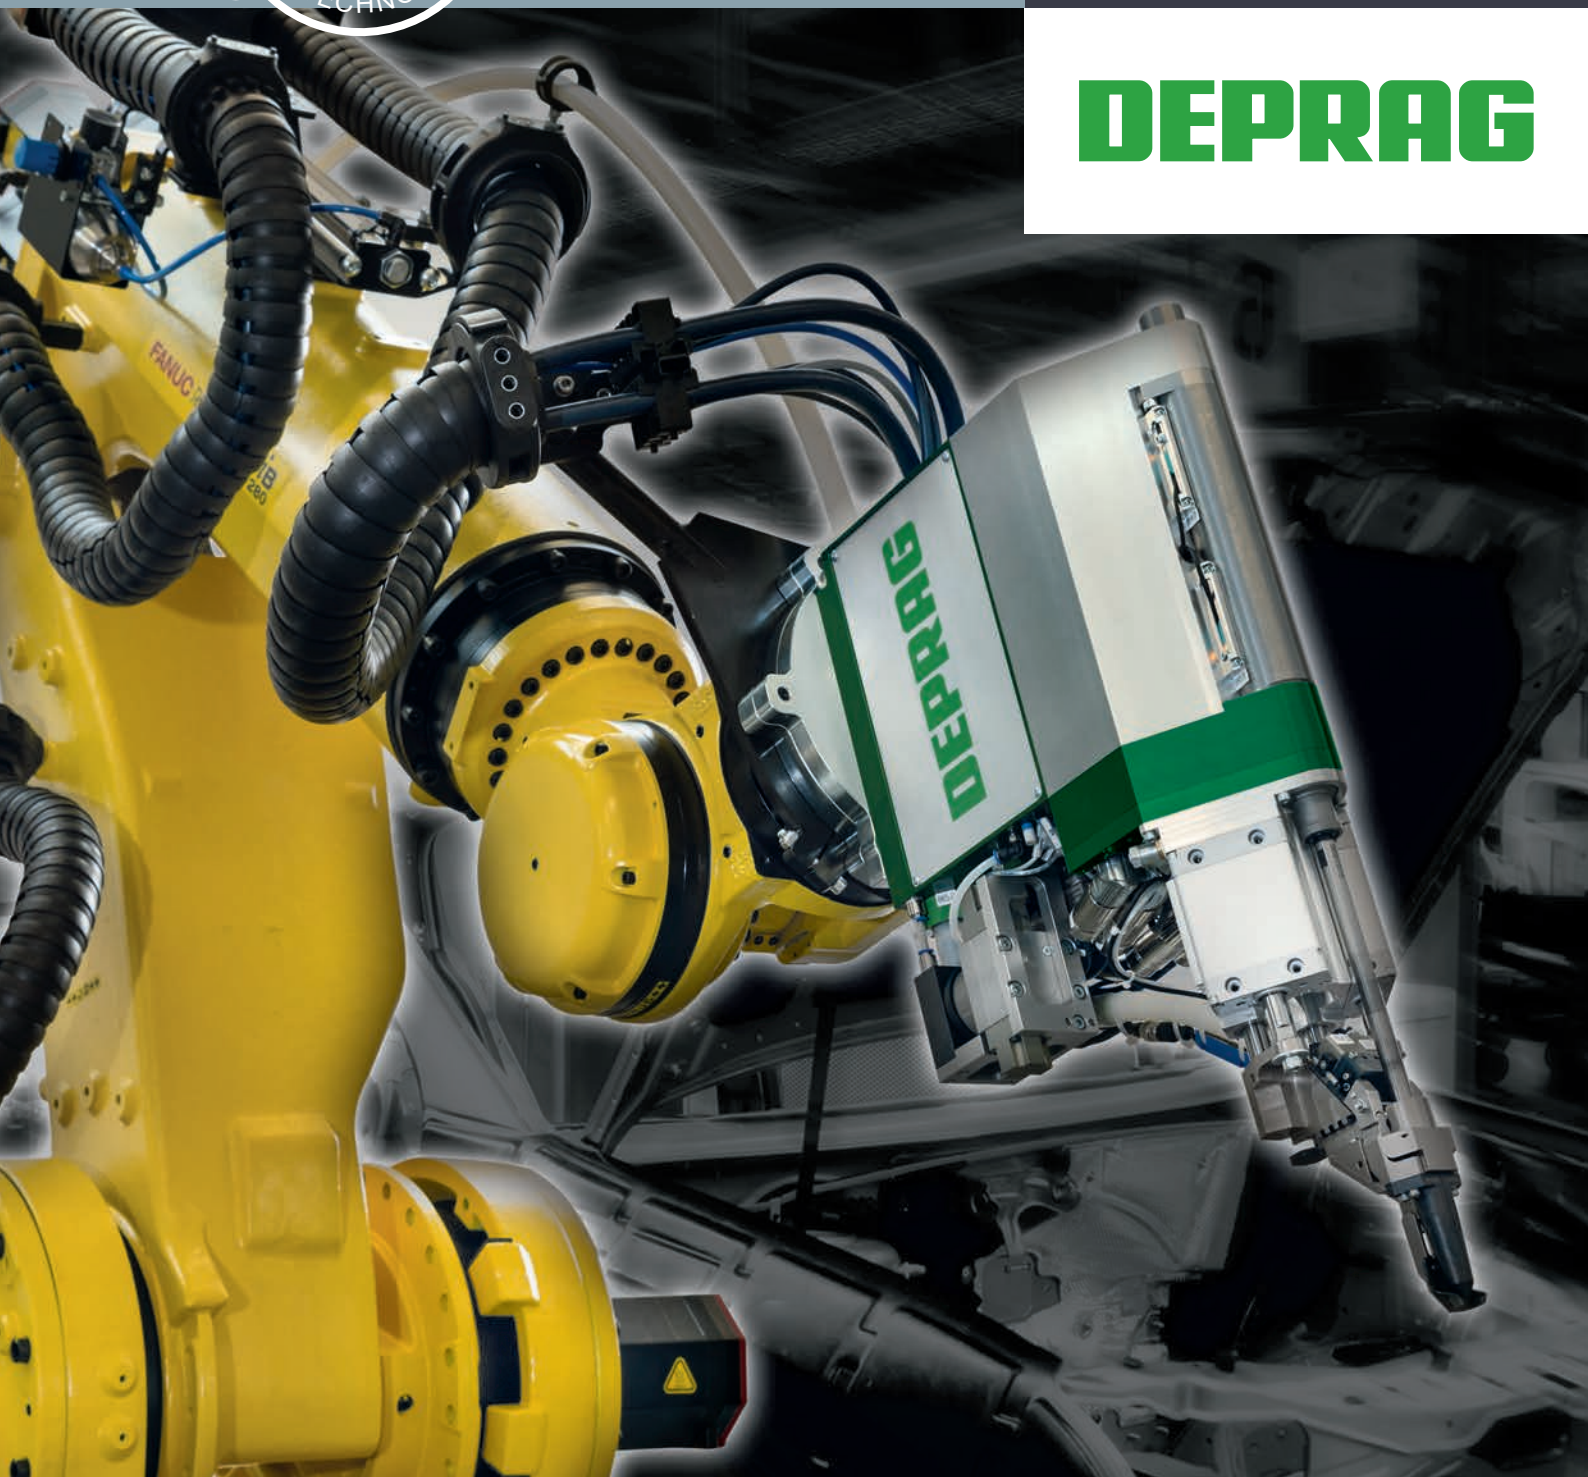


JOINING PROCESS VALIDATION
ADAPTIVE DFS

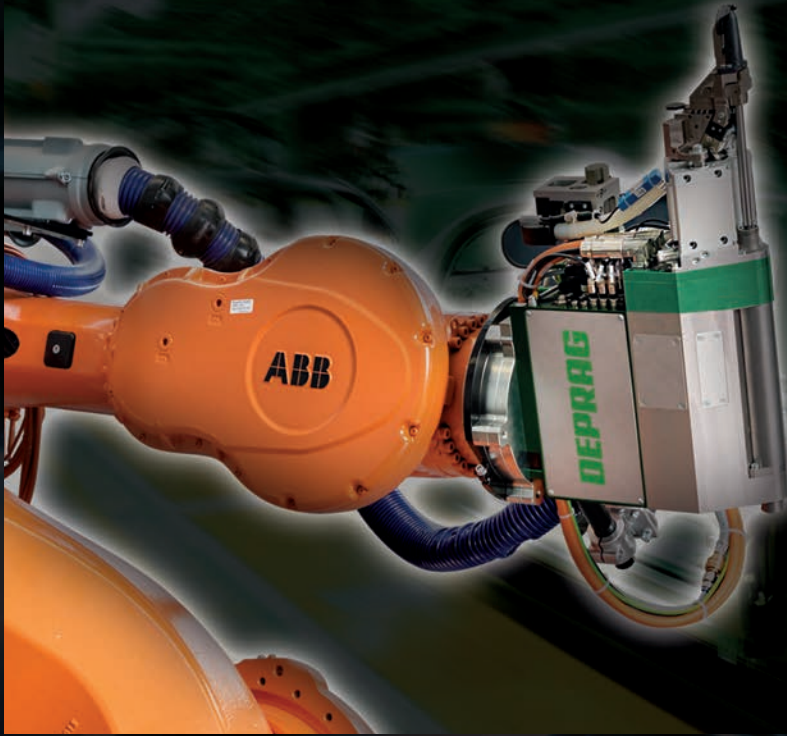

JOINING PROCESS VALIDATION


for every assembly joint

- Feasibility analysis
- Accessibility check of the individual assembly points
- Process analysis
Determine the process parameters
- Process validation
Define the process parameters
- Process documentation
- Coupon tests

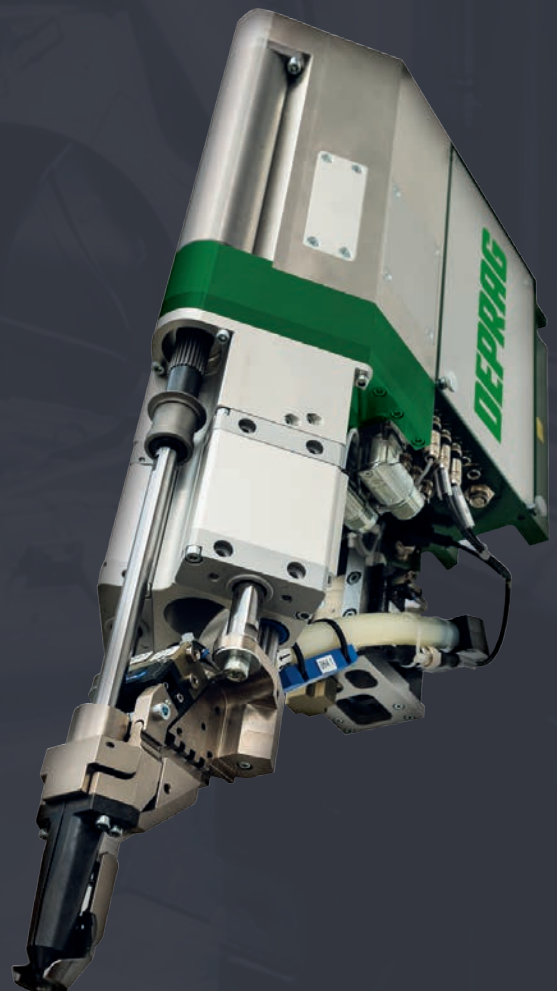

Feasibility analysis

- Check the feedability of the fastener
- Determine the suitable feeding technology
- Evaluate the material pairing/material strength

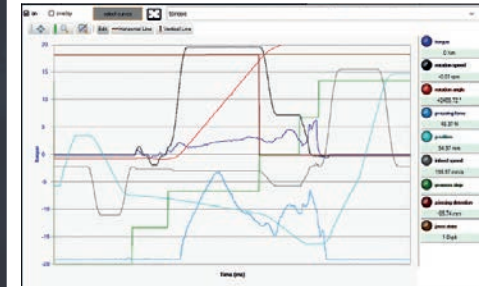

Accessibility check of the individual assembly points

- CAD-supported accessibility testing of every joint with rating, documentation and recommendation of needed modifications

Process analysis

- Parameter presetting and initial selection of the assembly program, utilizing the extensive DEPRAG data base
- Production environmental-, robot-supported assembly to determine the process parameters, based on the autonomous penetration-detection with closed loop parameter adjustment

| | |
|---------------------------------------|-------|
| Program | |
| 0. General | |
| 1. Downholder force | 300 |
| 1. Pre Positioning | |
| 1. Feed motion | |
| 1. Downforce upper limit | 500 |
| 2. Feed rate | 125 |
| 3. Switchover offset pre positioning | 0.50 |
| 2. Screwdriver | |
| 3. General | |
| 1. Supervision time | 2000 |
| 2. Detection | |
| 1. Feed motion | |
| 1. Downforce upper limit | 500 |
| 2. Feed rate | 10 |
| 3. Recess depth | 75 |
| 2. Screwdriver | |
| 1. Torque upper limit | 2.00 |
| 2. Speed right | 700 |
| 3. Speed left | 700 |
| 4. Angle right | 45 |
| 5. Angle left | 45 |
| 3. General | |
| 1. Supervision time | 2000 |
| 3. Piercing | |
| 1. Feed motion | |
| 1. Downforce upper limit | 2500 |
| 2. Feed rate | 10 |
| 3. Start downforce | 500 |
| 4. Threshold downforce | 50 |
| 5. Switchover offset pierce detection | 0.00 |
| 2. Screwdriver | |
| 1. Torque upper limit | 10.00 |
| 2. Speed | 1800 |
| 3. General | |
| 1. Supervision time | 2000 |
| 4. Thread forming | |
| 1. Feed motion | |
| 1. Downforce upper limit | 500 |
| 3. Switchover offset seating point | 0.20 |
| 2. Screwdriver | |
| 1. Torque upper limit | 10.00 |
| 2. Speed | 1800 |
| 3. General | |
| 1. Supervision time | 2000 |
| 5. Final tightening | |
| 1. Feed motion | |
| 1. Downforce upper limit | 2000 |
| 3. Depth lower limit | -1.00 |
| 4. Depth upper limit | 1.00 |
| 2. Screwdriver | |
| 1. Shut-off torque | 9.00 |
| 10. Torque hold time | 0 |
| 2. Torque lower limit | 8.00 |
| 3. Torque | 10.00 |
| 4. Speed | 750 |
| 6. Angle supervision | False |
| 7. Threshold torque | 0.00 |
| 8. Angle lower limit | 0 |
| 9. Angle upper limit | 0 |
| 3. General | |
| 1. Supervision time | 2000 |

Process validation

Define the following parameter for

- the controlled feed drive:
 - bit engagement
 - distance/time/force
 - spindle clamping force
- the controlled turn drive:
 - turn direction
 - speed
 - torque
 - angle
- the controlled downholder
 - down-hold load

Process documentation

- Process documentation for traceability
- Set of parameters for upload into your ADAPTIVE DFS
- Filing the parameter set into the DEPRAG data base

Coupon Tests


- ADAPTIVE DFS based coupon tests at laboratory conditions and based on the ascertained and set process parameters





DEPRAG

Your worldwide partner for
screwdriving technology and
automation

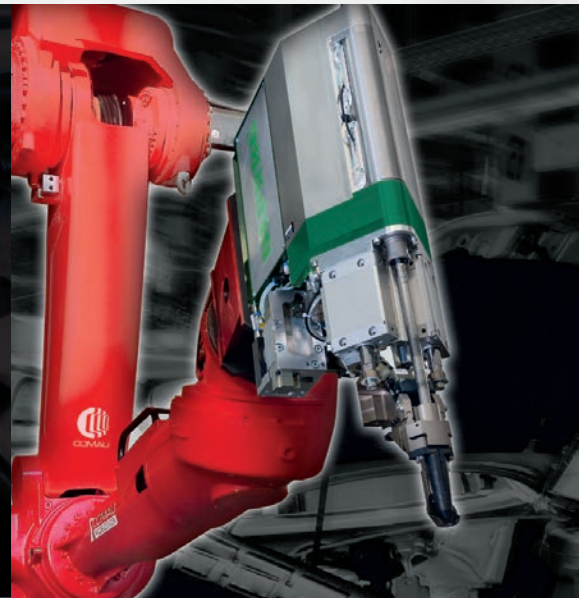

More information:
www.deprag.com